



Oppsett av
Zebra GK420d & Zebra GX420d
Til bruk med EdiPost




Når printeren er pakket ut:

- Sett i etikettene
- Koble USB kabelen mellom printeren og PC'n
- Skru på printeren med bryteren bak på printeren
- Driveren skal nå bli installert av seg selv på PC'n

Endring av driverinnstillinger:

Når printeren skal brukes med oppdelte etiketter eks. 102x192mm, så skal det brukes følgende innstillinger på driveren:

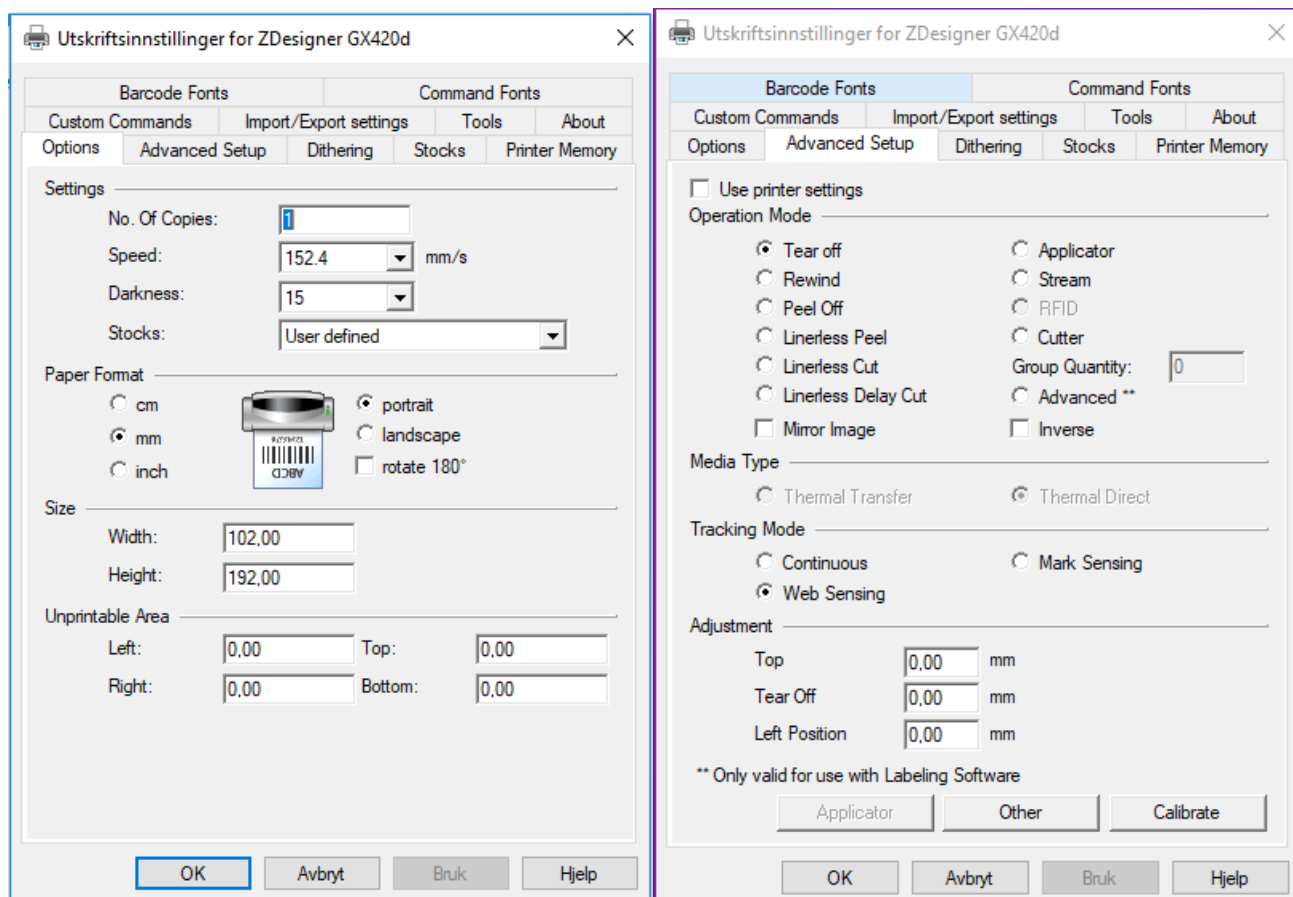

Utskriftsinnstillinger for ZDesigner GX420d

Barcode Fonts | Command Fonts

Custom Commands | Import/Export settings | Tools | About

Options | **Advanced Setup** | Dithering | Stocks | Printer Memory

Settings

No. Of Copies:

Speed: mm/s

Darkness:

Stocks:

Paper Format

☐ cm ☒ mm ☐ inch

☒ portrait ☐ landscape ☐ rotate 180°

Size

Width:

Height:

Unprintable Area

Left: Top:

Right: Bottom:

Utskriftsinnstillinger for ZDesigner GX420d

Barcode Fonts | Command Fonts

Custom Commands | Import/Export settings | Tools | About

Options | **Advanced Setup** | Dithering | Stocks | Printer Memory

☐ Use printer settings

Operation Mode

☒ Tear off ☐ Applicator

☐ Rewind ☐ Stream

☐ Peel Off ☐ RFID

☐ Linerless Peel ☐ Cutter

☐ Linerless Cut ☐ Group Quantity:

☐ Linerless Delay Cut ☐ Advanced **

☐ Mirror Image ☐ Inverse

Media Type

☐ Thermal Transfer ☒ Thermal Direct

Tracking Mode

☐ Continuous ☐ Mark Sensing

☒ Web Sensing

Adjustment

Top: mm

Tear Off: mm

Left Position: mm

** Only valid for use with Labeling Software